




INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁶ : A61B 17/12	A1	(11) International Publication Number: WO 98/17183 (43) International Publication Date: 30 April 1998 (30.04.98)
<p>(21) International Application Number: PCT/US97/19517</p> <p>(22) International Filing Date: 24 October 1997 (24.10.97)</p> <p>(30) Priority Data: 08/736,896 25 October 1996 (25.10.96) US</p> <p>(63) Related by Continuation (CON) or Continuation-in-Part (CIP) to Earlier Application US 08/736,896 (CON) Filed on 25 October 1996 (25.10.96)</p> <p>(71) Applicant (for all designated States except US): TARGET THERAPEUTICS, INC. [US/US]; 47201 Lakeview Boulevard, Fremont, CA 94538 (US).</p> <p>(72) Inventors; and (75) Inventors/Applicants (for US only): KEN, Christopher, G., M. [US/US]; 652 West Hillsdale Boulevard, San Mateo, CA 94403 (US). ACHARYA, Abhijit [US/US]; 13773 Lexington Court, Saratoga, CA 95070 (US).</p> <p>(74) Agents: WHEELLOCK, E., Thomas et al.; Morrison & Foerster LLP, 755 Page Mill Road, Palo Alto, CA 94304-1018 (US).</p>	<p>(81) Designated States: AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CU, CZ, DE, DK, EE, ES, FI, GB, GE, GH, HU, ID, IL, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, UA, UG, US, UZ, VN, YU, ZW, ARIPO patent (GH, KE, LS, MW, SD, SZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, ML, MR, NE, SN, TD, TG).</p> <p>Published With international search report.</p>	

(54) Title: DETACHABLE MULTIDIAMETER VASOOCCLUSIVE COIL

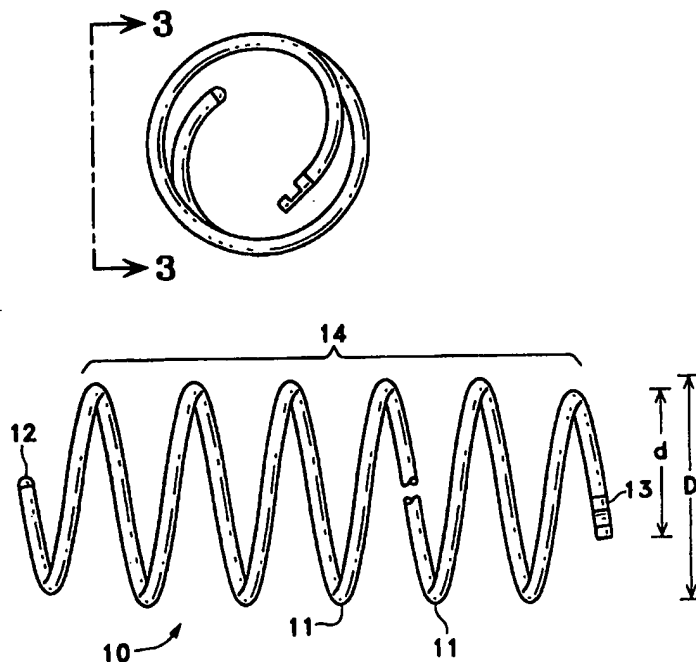

(57) Abstract

A vasoocclusive helical coil having a proximal end that carries a coupling member for attaching the coil to the distal end of a wire and a proximal winding that has a smaller diameter than adjacent windings whereby the proximal end of the coil is positioned radially inwardly of the main body of the coil.

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece	ML	Mali	TR	Turkey
BG	Bulgaria	HU	Hungary	MN	Mongolia	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MR	Mauritania	UA	Ukraine
BR	Brazil	IL	Israel	MW	Malawi	UG	Uganda
BY	Belarus	IS	Iceland	MX	Mexico	US	United States of America
CA	Canada	IT	Italy	NK	Niger	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NL	Netherlands	VN	Viet Nam
CG	Congo	KE	Kenya	NO	Norway	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NZ	New Zealand	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	PL	Poland		
CM	Cameroon	KR	Republic of Korea	PT	Portugal		
CN	China	KZ	Kazakhstan	RO	Romania		
CU	Cuba	LC	Saint Lucia	RU	Russian Federation		
CZ	Czech Republic	LI	Liechtenstein	SD	Sudan		
DE	Germany	LK	Sri Lanka	SE	Sweden		
DK	Denmark	LR	Liberia	SG	Singapore		
EE	Estonia						

DETACHABLE MULTIDIAMETER VASOOCCLUSIVE COILTECHNICAL FIELD

This invention is in the field of vasoocclusion devices. More particularly it relates to a helical vasoocclusion coil one end of which is adapted to be detachably connected to a wire
5 and in which the helix winding at that end has a smaller diameter than the adjacent windings.

BACKGROUND

Vasoocclusion devices are surgical instruments that are placed within vessels, typically via a catheter, to block the vessel or to fill a vascular cavity such as an aneurysm. One type of vasoocclusion device is in the form of a helical wire coil. See U. S. Patent No. 4,994,069.

10 The coil may be placed at the desired site in several ways. One involves loading the coil into the lumen of a catheter whose distal end is located at the site. The coil is then advanced through the catheter lumen using a pusher and expelled from the distal end of the catheter.

Another involves detachably coupling the coil to the distal end of a wire, advancing the assembly to the site using a catheter, and uncoupling the coil from the wire at the site. U. S.
15 Patents Nos. 5,234,437; 5,250,071; 5,261,916; 5,304,195; 5,312,415; and 5,350,397 describe coils that are detachably coupled to a wire.

Detachable coils carry a member on their proximal end that detachably engages or interlocks with a member on the distal end of the wire. A problem experienced with such coils is that the member carried on the coil is oriented tangentially to the helical diameter of
20 the coil. As such, when the coil is decoupled, the member extends tangentially outwardly from the helix diameter and may engage the vessel wall. (See Figure 1 of the drawings) Such engagement may injure or even perforate the vessel wall.

A principal object of this invention is to provide a detachable helical vasoocclusive coil in which the member that attaches to the wire is not oriented tangentially to the diameter
25 of the coil. Accordingly, the coils of this invention are less likely to injure the vessel wall.

DISCLOSURE OF THE INVENTION

One aspect of the invention is a helical vasoocclusion coil for use with a wire having a distal end, said coil having: (a) a proximal end adapted to detachably couple to the distal end of the wire; (b) a distal end; (c) a first diameter intermediate (a) and (b); and (d) a second diameter smaller than said first diameter at said proximal end whereby said proximal end is positioned radially inwardly of said first diameter.

Another object of the invention is an assembly for use in occluding a vessel or a cavity within a vessel comprising: a wire having a distal end that carries a first coupling member; and a helical vasoocclusion coil having: (i) a proximal end that carries a second coupling member that is detachably coupled to the first coupling member; (ii) a distal end; (iii) a first diameter intermediate (i) and (ii); and (iv) a second diameter smaller than said first diameter at said proximal end whereby the first coupling member is positioned radially inwardly of said first diameter.

BRIEF DESCRIPTION OF THE DRAWINGS

In the drawings, which are not to scale:

Figure 1 is an elevational view of a prior art coil.

Figure 2 is an elevational end view of one embodiment of the invention.

Figure 3 is an elevational partial side view of the coil of Figure 2.

MODES FOR CARRYING OUT THE INVENTION

Figures 2 and 3 depict an embodiment, generally designated 10, of the invention coil. Embodiment 10 is shown in its relaxed, helical configuration. As described in the art discussed in the Background section above, helical vasoocclusive coils are typically made of materials that have shape memories and can be deformed into an expanded, essentially linear shape for loading and advancement through a catheter to the site to be occluded. Once they are deployed from the catheter they assume a relaxed helical configuration, such as shown in Figure 3.

Coil 10 is composed of a multiplicity of windings 11 and has a distal end 12 and a proximal end 13. The windings of coil 10 will typically be made of a metal such as platinum, gold, rhodium, rhenium, palladium, tungsten and the like or alloys of such metals. These metals have significant radiopacity and their alloys may be tailored to provide desired degrees of stiffness and flexibility. The windings may be made of other suitable biocompatible materials such as polymers or composites of metals and polymers.

While the cross-section of the windings of the coil 10 is circular, windings having other cross-sectional shapes, e.g. elliptical, trapezoidal, rhombic, rectangular, and square, may be used. Circular cross-sectional windings will typically have a diameter of about 0.01 to about 0.50 mm. Correspondingly, the diameter of the helix, D (Figure 3), formed by the windings will normally be in the range of about 0.2 mm to about 30 mm. For neurovascular use the diameter of the helix will typically be in the range of 2.0 to 20 mm. The pitch of the windings may be uniform, as shown in Figure 3, or may vary over a portion or the entire length of the coil. The axial length of the coil will usually be in the range of 0.5 to 100 cm, more usually 2 to 40 cm. The coil will usually have 10 to 75 windings per cm, more usually 10 to 40 windings per cm. It will be appreciated that the above-described dimensions are not critical and that dimensions that are suitable for occluding vascular sites within the human body are intended.

As shown in Figure 3, the windings of the main body 14 of the coil form a helix of diameter D, whereas the proximal-most and distal-most windings have a diameter d that is smaller than D. As a result, the proximal and distal ends 12, 13, respectively, of the coil are located radially inwardly of the helix of main body 14 (Figure 2) rather than being located tangentially to that helix (Figure 1). Such positioning of the ends make the ends less likely to injure the vessel wall. As seen in Figures 2 and 3, the proximal end 13 of the coil has a slotted member 15 that is adapted to detachably couple to a mating member on the distal end of an elongated wire (not shown). Alternative mechanical coupling members are shown in U. S. Patents Nos. 5,234,437; 5,250,071; 5,261,916; 5,304,195; 5,312,415 and 5,350,397, the disclosures of which with respect thereto are incorporated herein by reference.

While not shown in the drawings, the coil may have fibers attached to it to facilitate embolization. See U. S. Patents Nos. 5,304,194; 5,476,472 and 5,382,259, the relevant

disclosures of which are incorporated herein by reference. Other modifications of the above described modes for carrying out the invention that are considered obvious or equivalent by those of skill in the medical device art and related arts are intended to be within the scope of the following claims.

CLAIMS

1. A helical vasoocclusion coil for use with a wire having a distal end, said coil having:
- 5 wire;
- (a) a proximal end adapted to detachably couple to the distal end of the
 - (b) a distal end;
 - (c) a first diameter intermediate (a) and (b); and
 - (d) a second diameter smaller than said first diameter at said proximal end
- whereby said proximal end is positioned radially inwardly of said first diameter.
- 10 2. The coil of claim 1 wherein the second diameter is also at the distal end of the coil whereby the distal end of the coil is also positioned radially inwardly of said first diameter.
3. The coil of claim 1 wherein said proximal end has a coupling member that detachably interlocks with the distal end of the wire.
- 15 4. An assembly for use in occluding a vessel or a cavity within a vessel comprising:
- (a) an elongated wire having a distal end that carries a first coupling member; and
 - (b) a helical vasoocclusion coil having:
 - 20 (i) a proximal end that carries a second coupling member that is detachably coupled to the first coupling member;
 - (ii) a distal end;
 - (iii) a first diameter intermediate (i) and (ii); and
 - (iv) a second diameter smaller than said first diameter at said
- 25 proximal end whereby the first coupling member is positioned radially inwardly of said first diameter.
5. The assembly of claim 4 wherein the second diameter is also at the distal end of the coil whereby the distal end of the coil is also positioned radially inwardly of said first diameter.

1/1




Fig. 1
(PRIOR ART)

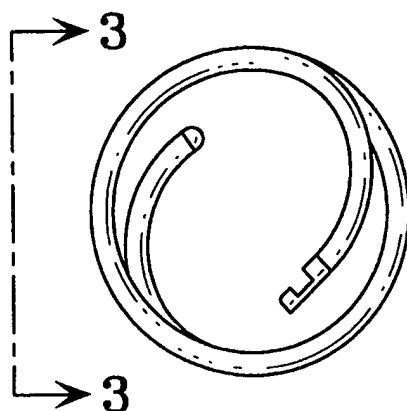


Fig. 2

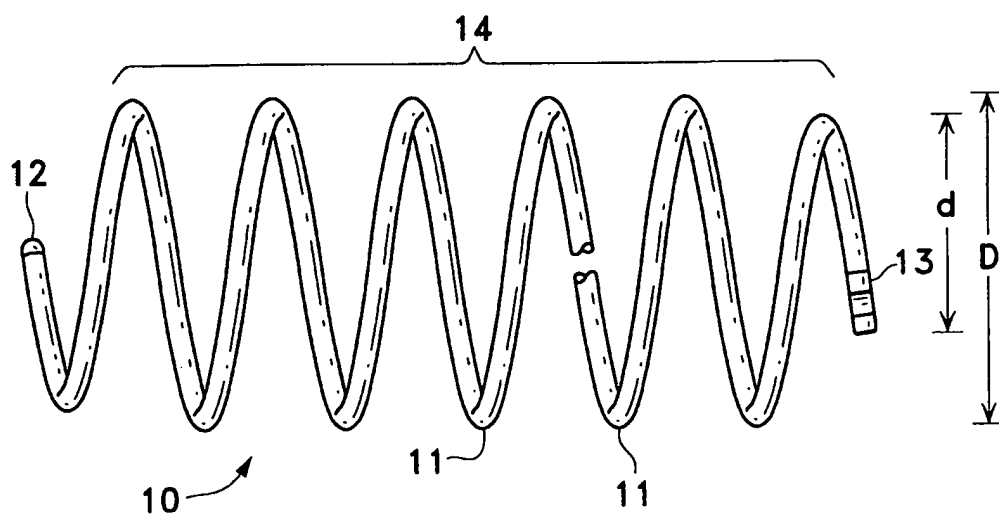


Fig. 3

INTERNATIONAL SEARCH REPORT

International Application No

PCT/US 97/19517

A. CLASSIFICATION OF SUBJECT MATTER
IPC 6 A61B17/12

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 6 A61B

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	DE 32 03 410 A (WÄLZLAGER NORMTEILE VEB) 25 November 1982	1-3
Y	see figures 7,8 ---	4,5
X	US 5 261 916 A (ENGELSON) 16 November 1993 cited in the application	1,3,4
Y	see column 2, line 56 - column 3, line 21 ---	4,5
X	WO 92 21400 A (MARKS) 10 December 1992 see figures 2,3,6 ---	1,4
X	EP 0 734 697 A (TARGET) 2 October 1996 see figure 2B ---	1
A	US 5 250 071 A (PALERMO) 5 October 1993 cited in the application see the whole document ---	1,4
-/--		



Further documents are listed in the continuation of box C.



Patent family members are listed in annex.

* Special categories of cited documents :

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier document but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

"&" document member of the same patent family

Date of the actual completion of the international search

16 January 1998

Date of mailing of the international search report

23/01/1998

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+31-70) 340-3016

Authorized officer

Barton, S

INTERNATIONAL SEARCH REPORT

International Application No

PCT/US 97/19517

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	WO 92 14408 A (NEUSS) 3 September 1992 ---	
P,X	EP 0 747 014 A (TARGET) 11 December 1996 see figures 1B,3 -----	1

INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/US 97/19517

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
DE 3203410 A	25-11-82	NONE	
US 5261916 A	16-11-93	AU 666698 B AU 3247993 A CA 2125653 A,C DE 9218710 U DE 616543 T EP 0616543 A ES 2074971 T IL 104021 A JP 2552812 B JP 6511174 T NO 942114 A WO 9311825 A	22-02-96 19-07-93 24-06-93 23-02-95 12-10-95 28-09-94 01-10-95 18-06-96 13-11-96 15-12-94 07-06-94 24-06-93
WO 9221400 A	10-12-92	US 5217484 A AU 665010 B AU 2188292 A CA 2110276 A EP 0587782 A JP 6508274 T	08-06-93 14-12-95 08-01-93 10-12-92 23-03-94 22-09-94
EP 734697 A	02-10-96	AU 5044096 A CA 2173023 A JP 8299454 A NO 961280 A US 5669931 A	10-10-96 01-10-96 19-11-96 01-10-96 23-09-97
US 5250071 A	05-10-93	AU 669928 B AU 4857793 A AU 684419 B AU 5086996 A CA 2119772 A,C DE 9320840 U DE 617632 T EP 0617632 A ES 2074972 T FI 942276 A JP 2584956 B JP 7502674 T	27-06-96 12-04-94 11-12-97 11-07-96 31-03-94 02-03-95 30-11-95 05-10-94 01-10-95 16-05-94 26-02-97 23-03-95

INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/US 97/19517

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 5250071 A		NO 941363 A	15-04-94
		WO 9406503 A	31-03-94

WO 9214408 A	03-09-92	DE 4104702 A	20-08-92
		AT 110551 T	15-09-94
		CA 2104119 A	16-08-92
		DE 59200446 D	06-10-94
		EP 0571422 A	01-12-93
		JP 6504931 T	09-06-94
		US 5536274 A	16-07-96

EP 747014 A	11-12-96	AU 682635 B	09-10-97
		AU 5583796 A	09-01-97
		CA 2178375 A	07-12-96
		JP 9099094 A	15-04-97
		NO 962336 A	09-12-96
